

**8080 P is a pigmented stamping ink developed specially for MARK II pads, weather-resistant and colour fast.**

### Properties:


The pigments ensure good covering capacity and minimum precipitation making this stamping ink excellent for marking dark backgrounds.

### Application:

We recommend 8080 P for marking painted and unpainted metals, rubber, wood, PVC; various plastics as well as for natural fibers such as cotton and linen. It is also possible to mark synthetic fibers such as polyester, rayon, canvas, Elastan or Polyacrylic with 8080 P. A suitability test should be carried out first because too many different qualities are available to allow a reliable recommendation.

### Drying time:

~6 - 7 min (metal)

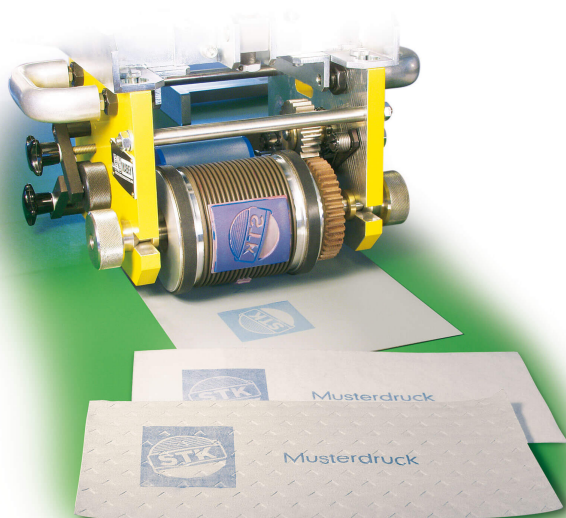

### Viscosity:

low viscosity, ~13 - 20 sec  
(Ford 4mm cup)

### Stamp material:

Rubber or special photo polymers

### Stamp pad material:


MARK II pads are recommended particularly, however, felt plate pads, the SOLI plate pads and flexographic printing presses with ink reservoir are also possible. The ink remains moist for stamping for a long period without drying out in all stamp pads

### Thinner/cleaner:

Thinner 405

### Available standard sizes:

50ml/g · 250ml/g · 1000ml/g · 5000 ml/g



Opaque