

**382 P is a slightly slower drying, pigmented, solvent-based stamping ink which provides extremely good coverage for colour fast prints.**

## Properties:


Suitable primarily for non-absorbent, dark, however also light background materials. It provides non-smearing extremely resilient prints which withstand high temperatures.

## Application:

We recommend 382 P for marking dark background rubber as well as for metals, various plastics, textiles and untreated wood. Suitability tests should be carried out because too many different qualities are available to allow a reliable recommendation.

## Drying time:

>10min (metal)

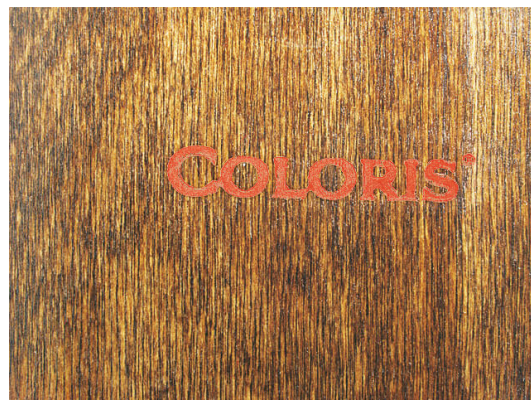

## Viscosity:

medium viscosity, ~40-110sec  
(Ford 4mm cup)

## Stamp material:

Rubber or special photo polymers

## Stamp pad material:



We recommend felt plate pads for 382 P. However, use on ink rollers is also possible due to the slower drying time. In the case of automatic stamping machines, systems with an ink reservoir are preferable.

## Thinner/cleaner:

Thinner 405

## Available standard sizes:

50ml/g · 250ml/g · 1000ml/g

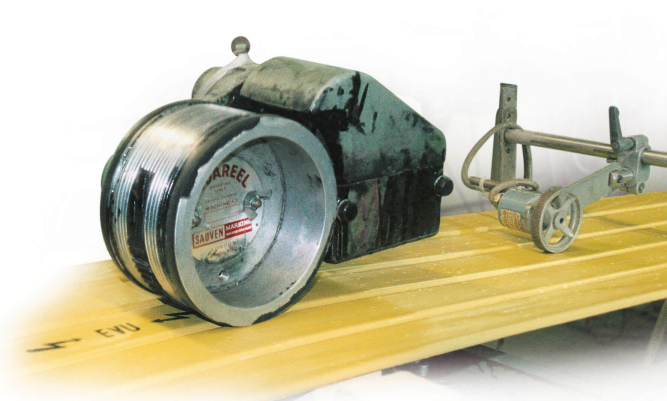

Opaque